

EUROPEAN PATENT APPLICATION

(43) Date of publication:
17.11.2004 Bulletin 2004/47

(51) Int Cl.7: **H04L 12/56**

(21) Application number: **04011376.3**

(22) Date of filing: **13.05.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
 HU IE IT LI LU MC NL PL PT RO SE SI SK TR**
 Designated Extension States:
AL HR LT LV MK

(30) Priority: 14.05.2003 JP 2003136137

(71) Applicant: **NTT DoCoMo, Inc.**
Tokyo (JP)

(72) Inventors:
 • **Moon, Sung Uk**
 11-1, Nagatacho 2-chome Chiyoda-ku Tokyo (JP)

- **Ishii, Minami**
11-1, Nagatacho 2-chome Chiyoda-ku Tokyo (JP)
- **Nakamura, Takehiro**
11-1, Nagatacho 2-chome Chiyoda-ku Tokyo (JP)
- **Usuda, Masafumi**
11-1, Nagatacho 2-chome Chiyoda-ku Tokyo (JP)
- **Kato, Yasuhiro**
11-1, Nagatacho 2-chome Chiyoda-ku Tokyo (JP)
- **Imamura, Yoshimasa**
11-1, Nagatacho 2-chome Chiyoda-ku Tokyo (JP)


(74) Representative: **HOFFMANN EITLE**
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) **Determination of a packet size in a packet communications system**

(57) A packet communications system which transmits a packet at a predetermined transmission rate includes a packet size controller (14) configured to

change a size of the packet in accordance with available space of a transmission buffer (11) storing the packet, when the predetermined transmission rate is changed.

FIG.3

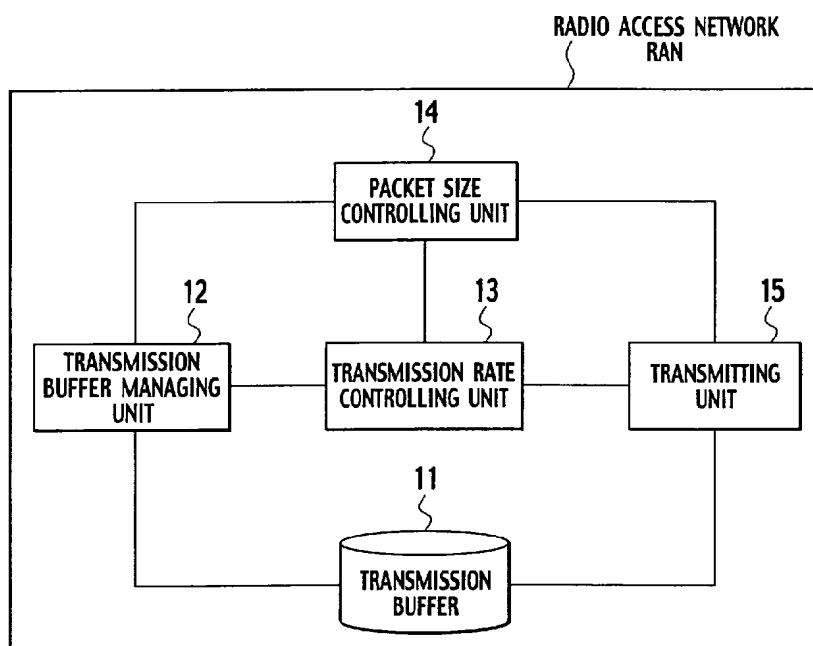

Description

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application is based upon and claims the benefit of priority from the prior Japanese Patent Application No. P2003-136137, filed on May 14, 2003; the entire contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0002] The present invention relates to a packet communications system transmitting a packet at a predetermined transmission rate.

[0003] Especially, the present invention relates to a packet communications system using an HSDPA (High speed downlink packet access) scheme which is a packet communications technique for achieving a speedup of a peak transmission rate, a reduction of transmission delay, an increase in throughput and an improvement of radio resource usage efficiency.

2. Description of the Related Art

[0004] FIG. 1 shows a packet communications system using the HSDPA scheme. As shown in FIG. 1, the packet communications system is configured with a core network CN and a radio access network RAN. The radio access network RAN includes a plurality of radio network controllers RNCs and a plurality of base stations (Node Bs).

[0005] The radio access network RAN is connected to a plurality of mobile stations (UEs: User Equipments) via radio interfaces. As shown in FIG. 1, the radio access network RAN transmits an HS-DSCH (High speed-Downlink Shared Channel), which is a transport channel for downlink packet transmission, to a mobile station UE.

[0006] Referring to a flowchart shown in FIG. 2, an operation of changing a transmission rate of a downlink packet in the conventional packet communications system will be described.

[0007] As shown in FIG. 2, in step S601, an RLC (Radio Link Controller) connection is established over a DTCH (Dedicated Traffic Channel), which is a logical channel mapped to the HS-DSCH, between the radio access network RAN and the mobile station UE.

[0008] At the time when the RLC connection has been established in step S601, the transmission rate of the downlink packet (a transmission rate of the HS-DSCH or the DTCH) is "TX1" which is smaller than or equal to "384kbps", and a size of the downlink packet (RLC-PDU: Radio Link Connection-Packet Data Unit) to be transmitted via the RLC connection is "336 bits".

[0009] In step S602, the radio access network RAN

transmits the transmission rate of the downlink packet, when an amount of data of the downlink packet to be transmitted increases. For example, the transmission rate of the downlink packet is changed to "TX2" which is larger than "384kbps".

[0010] In step S603, a Re-establishment of the RLC connection between the radio access network RAN and the mobile station UE is generated, when the transmission rate of the downlink packet is increased.

[0011] In step S604, the size of the RLC-PDU is changed to "656bits", after the Re-establishment of the RLC connection is generated.

[0012] The above change of the size of the RLC-PDU is performed in consideration with transmission efficiency.

[0013] However, there is a problem in that the Re-establishment of the RLC connection when the transmission rate of the downlink packet is changed, so that the packets stored in a transmission buffer are deleted and packet transmission throughput is reduced.

BRIEF SUMMARY OF THE INVENTION

[0014] In viewing of the foregoing, it is an object of the present invention to provide a packet communications system which can change the transmission rate of a downlink packet, while preventing the throughput from being reduced, due to the deletion of the packets stored in the transmission buffer.

[0015] A first aspect of the present invention is summarized as a packet communications system which transmits a packet at a predetermined transmission rate. The packet communications system includes a packet size controller configured to change a size of the packet in accordance with available space of a transmission buffer storing the packet, when the predetermined transmission rate is changed.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0016]

FIG. 1 is a diagram showing the entire configuration of a packet communications system including a radio access network;

FIG. 2 is a flowchart showing an operation of changing a transmission rate and a size of a packet in the conventional radio access network;

FIG. 3 is a functional block diagram of a radio access network according to one embodiment of the present invention;

FIG. 4 is a diagram for explaining a transmission buffer in the radio access network according to the embodiment of the present invention;

FIG. 5 is a flowchart showing an operation of changing a transmission rate and a size of a packet in the radio access network according to the embodiment

of the present invention;

FIG. 6 a flowchart showing an operation of changing a transmission rate and a size of a packet in the radio access network according to the embodiment of the present invention;

FIG. 7 is a sequence diagram showing an operation of changing a transmission rate and a size of a packet, in a protocol architecture of the radio access network according to the embodiment of the present invention;

FIG. 8 is a sequence diagram showing an operation of changing a transmission rate and a size of a packet, in a protocol architecture of the radio access network according to the embodiment of the present invention; and

FIG. 9 is a sequence diagram showing an operation of changing a transmission rate and a size of a packet, in a protocol architecture of the radio access network according to the embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

<A configuration of a packet communications system according to a first embodiment of the present invention>

[0017] Referring to FIG. 3, a configuration of a radio access network RAN in a packet communications system according to a first embodiment of the present invention will be described.

[0018] As shown in FIG. 3, the radio access network RAN includes a transmission buffer 11, a transmission buffer managing unit 12, a transmission rate controlling unit 13, a packet size controller 14 and a transmitting unit 15.

[0019] The transmission buffer 11 is configured to store packets (RLC-PDUs) to be transmitted to the mobile station UE via the RLC connection.

[0020] The transmission buffer 11 can be configured to store packets (RLC-PDUs) to be re-transmitted to the mobile station UE via the RLC connection.

[0021] The transmission buffer 11 can be configured to delete packets which have elapsed for a predetermined period since the packets were stored in the transmission buffer 11, and packets which have been re-transmitted a predetermined number of times and the like.

[0022] The transmission buffer managing unit 12 is configured to manage available space of a transmission buffer 11. To be more specific, the transmission buffer managing unit 12 is configured to manage an amount of data of packets (the number of bits included in packets or the number of packets) stored in the transmission buffer 11, a remaining amount of the transmission buffer 11 (available space of the transmission buffer 11) and the like.

[0023] The transmission rate controlling unit 13 is

configured to control the transmission rate of the downlink packet to be transmitted to the mobile station UE.

[0024] As shown in FIG. 4, for example, the transmission rate controlling unit 13 can change the transmission rate of the downlink packet from a predetermined transmission rate "TX1" to a higher transmission rate "TX2", when the amount of data X of the packets stored in the transmission buffer 11 is continuously larger than or equal to a second data amount threshold Thd2. For example, the predetermined transmission rate "TX1" is smaller than or equal to "384kbps", and the higher transmission rate "TX2" is greater than "384kbps".

[0025] The transmission rate controlling unit 13 can change the transmission rate of the downlink packet from the predetermined transmission rate "TX1" to the higher transmission rate "TX2", when the average of the amount of data X of the downlink packets stored in the transmission buffer 11 during a predetermined period is larger than or equal to the second data amount threshold Thd2.

[0026] As shown in FIG. 4, the transmission rate controlling unit 13 can change the transmission rate of the downlink packet from the predetermined transmission rate "TX1" to the higher transmission rate "TX2", when a remaining amount Br of the transmission buffer 11 is continuously smaller than or equal to a second remaining buffer amount threshold Thbr2.

[0027] The transmission rate controlling unit 13 can change the transmission rate of the downlink packet from the predetermined transmission rate "TX1" to the higher transmission rate "TX2", when the average of the remaining amount Br of the transmission buffer 11 during a predetermined period is continuously smaller than or equal to a second remaining buffer amount threshold Thbr2.

[0028] As described above, the transmission rate controlling unit 13 can increase the transmission rate of the downlink packet, when an amount of data to be transmitted increases.

[0029] The transmission rate controlling unit 13 can be configured to increase the transmission rate of the downlink packet, when a predetermined condition is satisfied (for example, a radio propagation path between the radio access network RAN and the mobile station UE is improved).

[0030] The packet size controller 14 is configured to control a size of a downlink packet (that is, a size of an RLC-PDU) to be transmitted to the mobile station UE via the RLC connection.

[0031] The packet size controller 14 is configured to generate an Re-establishment of the RLC connection so as to change the size of the downlink packet, when the transmission rate of the downlink packet is changed.

[0032] Basically, the packet size controller 14 is configured to increase the size of the downlink packet, when the transmission rate of the downlink packet is changed from the predetermined transmission rate "TX1" to the higher transmission rate "TX2".

[0033] For example, in this case, the packet size controller 14 changes the size of the downlink packet from "336bits" to "656bits".

[0034] As shown in FIG. 4, however, the packet size controller 14 is configured to maintain the size of the downlink packet without generating the Re-establishment of the RLC connection, when the transmission rate of the downlink packet is changed and when an amount of data X of packets stored in the transmission buffer 11 is larger than or equal to a first data amount threshold Thd1.

[0035] As shown in FIG. 4, the packet size controller 14 is configured to maintain the size of the downlink packet without generating the Re-establishment of the RLC connection, when the transmission rate of the downlink packet is changed and when a remaining amount Br of the transmission buffer 11 is smaller than or equal to a first remaining buffer amount threshold Thbr1.

[0036] As described above, the packet size controller 14 maintains the size of the downlink packet when a large amount of data of the downlink packets is stored in the transmission buffer 11 (that is, when available space of the transmission buffer 11 is small), so as to prevent the packets stored in the transmission buffer 11 from being deleted due to an occurrence of the Re-establishment of the RLC connection.

[0037] The transmitting unit 15 is configured to transmit packets to the mobile station UE, with using a transmission rate instructed by the transmission rate controlling unit 13 and a size of an RLC-PDU instructed by the packet size controller 14.

[0038] The transmission buffer 11, the transmission buffer managing unit 12, the transmission rate controlling unit 13 and the packet size controller 14 can be disposed in the radio network controller RNC or the base station which is included in the radio access network RAN.

<An operation of the packet communications system according to the embodiment >

[0039] Referring to FIGs. 5 and 6, an operation of changing the transmission rate of the downlink packet in the packet communications system according to the above embodiment will be described.

[0040] As shown in FIG. 5, in step S301, an RLC connection is established between the radio access network RAN and the mobile station UE.

[0041] At the time when the RLC connection has been established in step S301, the transmission rate of the downlink packet is "TX1" which is smaller than or equal to "384kbps", and a size of the RLC-PDU is "336 bits".

[0042] In step S302, the transmission rate controlling unit 13 of the radio access network RAN determines whether an amount of data X of packets stored in the transmission buffer 11 is larger than or equal to the second data amount threshold Thd2 or not.

[0043] When the amount of data X is larger than or equal to the second data amount threshold Thd2, the operation goes to step S303. When the amount of data X is smaller than the second data amount threshold Thd2, the operation repeats step S302.

[0044] In step S303, the transmission rate controlling unit 13 changes the transmission rate of the downlink packet. That is, the transmission rate of the downlink packet is changed to "TX2" which is larger than "384kbps".

[0045] In step S304, the packet size controlling unit 14 of the radio access network RAN determines whether the amount of data X of packets stored in the transmission buffer 11 is larger than or equal to the first data amount threshold Thd1 or not.

[0046] When the amount of data X is larger than or equal to the first data amount threshold Thd1, the operation goes to step S305. When the amount of data X is smaller than the first data amount threshold Thd1, the operation repeats step S304.

[0047] In step S305, a Re-establishment of the RLC connection between the radio access network RAN and the mobile station UE is generated.

[0048] In step S306, the size of the RLC-PDU is changed to "656bits", after the Re-establishment of the RLC connection is generated.

[0049] As shown in FIG. 6, the method of packet communications according to the embodiment can replace steps S302 and S304 shown in FIG. 5 with steps S402 and S404 respectively, so as to change the transmission rate of the downlink packet.

[0050] As shown in FIG. 6, in step S402, the transmission rate controlling unit 13 of the radio access network RAN determines whether a remaining amount Br of the transmission buffer 11 is smaller than or equal to the second remaining buffer amount threshold Thbr2 or not.

[0051] When the remaining amount Br is smaller than or equal to the second remaining buffer amount threshold Thbr2, the operation goes to step S403. When the remaining amount Br is larger than the second remaining buffer amount threshold Thbr2, the operation repeats step S402.

[0052] In step S404, the packet size controlling unit 14 of the radio access network RAN determines whether the remaining amount Br of the transmission buffer 11 is smaller than or equal to the first remaining buffer amount threshold Thbr1 or not.

[0053] When the remaining amount Br is smaller than or equal to the first remaining buffer amount threshold Thbr1, the operation goes to step S405. When the remaining amount Br is larger than the first remaining buffer amount threshold Thbr1, the operation repeats step S404.

[0054] Referring to FIGs. 7 to 9, the operation of changing the transmission rate of the downlink packet in the radio access network RAN will be described in consideration of a protocol architecture.

[0055] First, an example of FIG. 7 will be explained.

In step S701, a protocol function of an RLC layer (an RLC entity) of the radio access network RAN monitors an amount of data X of RLC-PDUs, which are stored in the transmission buffer 11, to be transmitted or re-transmitted to the mobile station UE via an RLC connection.

[0056] In step S702, the RLC entity instructs a protocol function of a MAC layer (a MAC entity) to change a transmission rate of a DTCH related to the RLC connection from a predetermined transmission rate "TX1" to a higher transmission rate "TX2", when a predetermined condition is satisfied in the transmission buffer 11.

[0057] For example, the RLC entity instructs the MAC entity to increase the transmission rate of the DTCH, when an amount of data X of RLC-PDUs stored in the transmission buffer 11 is continuously larger than or equal to the second data amount threshold Thd2, or when a remaining amount Br of the transmission buffer 11 is continuously smaller than or equal to the second remaining buffer amount threshold Thbr2.

[0058] In step S703, the MAC entity instructs a protocol function of a physical layer to change a transmission rate of an HS-DSCH mapped to the DTCH from the predetermined transmission rate "TX1" to the higher transmission rate "TX2", in accordance with the instruction from the RLC entity.

[0059] The protocol function of the physical layer changes a transmission rate of a physical channel mapped to the HS-DSCH from the predetermined transmission rate "TX1" to the higher transmission rate "TX2", in accordance with the instruction from the MAC entity.

[0060] In step S704, the RLC entity notifies a measurement result of the amount of data X of the RLC-PDUs stored in the transmission buffer 11 to a protocol function of an upper layer, when having instructed the MAC entity to change the transmission rate of the DTCH.

[0061] In step S705, the protocol function of the upper layer determines whether or not the amount of data X of the RLC-PDUs stored in the transmission buffer 11 is larger than or equal to the first data amount threshold Thd1, or whether or not the remaining amount Br of the transmission buffer 11 is smaller than or equal to the first remaining buffer amount threshold Thbr1.

[0062] When the amount of data X of the RLC-PDUs stored in the transmission buffer 11 is smaller than the first data amount threshold Thd1, or when the remaining amount Br of the transmission buffer 11 is larger than the first remaining buffer amount threshold Thbr1, the protocol function of the upper layer notifies an Re-establishment request to the RLC entity. The Re-establishment request is a request for instructing to change a size of an RLC-PDU.

[0063] On the other hand, when the amount of data X of the RLC-PDUs stored in the transmission buffer 11 is larger than or equal to the first data amount threshold Thd1, or when the remaining amount Br of the transmission buffer 11 is smaller than or equal to the first remaining buffer amount threshold Thbr1, the protocol function

of the upper layer does not notify the Re-establishment request to the RLC entity.

[0064] In step S706, the RLC entity performs an Re-establishment processing, in response to the Re-establishment request from the protocol function of the upper layer.

[0065] To be more specific, the RLC entity establishes a new RLC connection with an RLC entity of the mobile station UE, after discarding all the RLC-PDUs stored in the transmission buffer 11.

[0066] A size of RLC-PDUs to be transmitted over the newly established RLC connection has been changed to a size instructed by the Re-establishment request, and is normally larger than the size of RLC-PDUs to be transmitted over the previous RLC connection.

[0067] Second, an example of FIG. 8 will be explained. In step S801, the RLC entity of the radio access network RAN monitors an amount of data X of RLC-PDUs, which are stored in the transmission buffer 11, to be transmitted or re-transmitted to the mobile station UE via an RLC connection.

[0068] In step S802, the RLC entity notifies a measurement result of the amount of data X of the RLC-PDUs stored in the transmission buffer 11 to the protocol function of the upper layer, at predetermined intervals.

[0069] In step S803, the protocol function of the upper layer determines whether or not to change a transmission rate and a size of an RLC-PDU to be transmitted over the RLC connection, in accordance with the measurement result notified from the RLC entity.

[0070] When a predetermined condition is satisfied in the transmission buffer 11, the protocol function of the upper layer notifies the Re-establishment request for instructing to change the transmission rate and the size of the RLC-PDU, to the RLC entity.

[0071] For example, when the amount of data X of the RLC-PDUs stored in the transmission buffer 11 is continuously larger than or equal to the second data amount threshold Thd2, and when the amount of data X of the RLC-PDUs stored in the transmission buffer 11 is continuously smaller than the first data amount threshold Thd1, the protocol function of the upper layer notifies the Re-establishment request to the RLC entity.

[0072] Also, when the remaining amount Br of the transmission buffer 11 is continuously smaller than or equal to the second remaining buffer amount threshold Thbr2, and when the remaining amount Br of the transmission buffer 11 is continuously larger than the first remaining buffer amount threshold Thbr1, the protocol function of the upper layer notifies the Re-establishment request to the RLC entity.

[0073] Otherwise, the protocol function of the upper layer does not notify the Re-establishment request to the RLC entity.

[0074] In step S804, the RLC entity instructs the MAC entity to change a transmission rate of a DTCH related to the RLC connection from the a predetermined transmission rate "TX1" to a higher transmission rate "TX2"

which is instructed by the Re-establishment request, in response to the Re-establishment request from the protocol function of the upper layer.

[0075] In step S805, the MAC entity instructs the protocol function of the physical layer to change a transmission rate of an HS-DSCH mapped to the DTCH from the predetermined transmission rate "TX1" to the higher transmission rate "TX2", in response to the instruction from the RLC entity.

[0076] The protocol function of the physical layer changes a transmission rate of a physical channel mapped to the HS-DSCH from the predetermined transmission rate "TX1" to the higher transmission rate "TX2", in response to the instruction from the MAC entity.

[0077] As in the case of step 706 in FIG. 7, in step S806, the RLC entity performs the Re-establishment processing, in response to the Re-establishment request from the protocol function of the upper layer.

[0078] Third, an example of FIG. 9 will be explained. In step S901, the RLC entity of the radio access network RAN monitors an amount of data X of RLC-PDUs, which are stored in the transmission buffer 11, to be transmitted or re-transmitted to the mobile station UE via an RLC connection.

[0079] In step S902, the RLC entity determines whether or not to change a transmission rate and a size of an RLC-PDU to be transmitted over the RLC connection, in accordance with a measurement result of the amount of data X of the RLC-PDUs stored in the transmission buffer 11.

[0080] In step S902, the RLC entity instructs the MAC entity to change a transmission rate of the RLC-PDU, when a predetermined condition is satisfied.

[0081] For example, the RLC entity instructs the MAC entity to change a transmission rate of a DTCH related to the RLC connection from the a predetermined transmission rate "TX1" to a higher transmission rate "TX2", when the amount of data X of the RLC-PDUs stored in the transmission buffer 11 is continuously larger than or equal to the second data amount threshold Thd2, or when the remaining amount Br of the transmission buffer 11 is continuously smaller than or equal to the second remaining buffer amount threshold Thbr2.

[0082] In step S903, the MAC entity instructs the protocol function of the physical layer to change a transmission rate of an HS-DSCH mapped to the DTCH from the predetermined transmission rate "TX1" to the higher transmission rate "TX2", in response to the instruction from the RLC entity.

[0083] The protocol function of the physical layer changes a transmission rate of a physical channel mapped to the HS-DSCH from the predetermined transmission rate "TX1" to the higher transmission rate "TX2", in response to the instruction from the MAC entity.

[0084] In step S904, the RLC entity determines whether or not the amount of data X of the RLC-PDUs

stored in the transmission buffer 11 is continuously larger than or equal to the first data amount threshold Thd1, or whether or not the remaining amount Br of the transmission buffer 11 is continuously smaller than or equal to the first remaining buffer amount threshold Thbr1, when having instructed the MAC entity to change the transmission rate of the DTCH.

[0085] As in the case of step 706 in FIG. 7, when the amount of data X of the RLC-PDUs stored in the transmission buffer 11 is not continuously larger than or equal to the first data amount threshold Thd1, or when the remaining amount Br of the transmission buffer 11 is not continuously smaller than or equal to the first remaining buffer amount threshold Thbr1, the RLC entity performs the Re-establishment processing.

[0086] Otherwise, when the amount of data X of the RLC-PDUs stored in the transmission buffer 11 is continuously larger than or equal to the first data amount threshold Thd1, or when the remaining amount Br of the transmission buffer 11 is continuously smaller than or equal to the first remaining buffer amount threshold Thbr1, the RLC entity does not perform the Re-establishment processing.

<Functions and effects of the packet communications system according to the embodiment>

[0087] The packet communications system according to the embodiment can change the size of the RLC-PDU in accordance with available space of the transmission buffer 11, so as to prevent packets stored in the transmission buffer 11 from being deleted due to the Re-establishment of the RLC connection.

[0088] For example, the packet communications system according to the embodiment can maintain the size of the RLC-PDU, when a large amount of data of the downlink packets is stored in the transmission buffer 11 (that is, when available space of the transmission buffer 11 is small), so as to prevent packets stored in the transmission buffer 11 from being deleted due to the Re-establishment of the RLC connection.

[0089] The present invention can provide a packet communications system which can change the transmission rate of a downlink packet, while preventing the throughput from being reduced, due to the deletion of the packets stored in the transmission buffer.

[0090] Additional advantages and modifications will readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details and the representative embodiment shown and described herein. Accordingly, various modifications may be made without departing from the scope of the general inventive concept as defined by the appended claims and their equivalents.

Claims

mined period.

1. A packet communications system which transmits a packet at a predetermined transmission rate, the system comprising: 5
 - a packet size controller configured to change a size of the packet in accordance with available space of a transmission buffer storing the packet, when the predetermined transmission rate is changed. 10
2. The packet communications system according to claim 1, wherein 15
 - the packet size controller is configured to maintain the size of the packet, when an amount of data of the packet stored in the transmission buffer is larger than a first data amount threshold.
3. The packet communications system according to claim 1, wherein 20
 - the packet size controller is configured to maintain the size of the packet, when a remaining amount of the transmission buffer is smaller than a first remaining buffer amount threshold. 25
4. The packet communications system according to claim 1, further comprising 30
 - a transmission rate controller configured to increase the predetermined transmission rate, when an amount of data of the packet stored in the transmission buffer is larger than a second data amount threshold.
5. The packet communications system according to claim 1, further comprising 35
 - a transmission rate controller configured to increase the predetermined transmission rate, when a remaining amount of the transmission buffer is smaller than a second remaining buffer amount threshold. 40
6. The packet communications system according to claim 4, wherein 45
 - the transmission rate controller is configured to change the predetermined transmission rate, when the amount of data of the packet stored in the transmission buffer is continuously larger than the second data amount threshold during a predetermined period. 50
7. The packet communications system according to claim 5, wherein 55
 - the transmission rate controller is configured to increase the predetermined transmission rate, when the remaining amount of the transmission buffer is continuously smaller than the second remaining buffer amount threshold during a predeter-

FIG.1

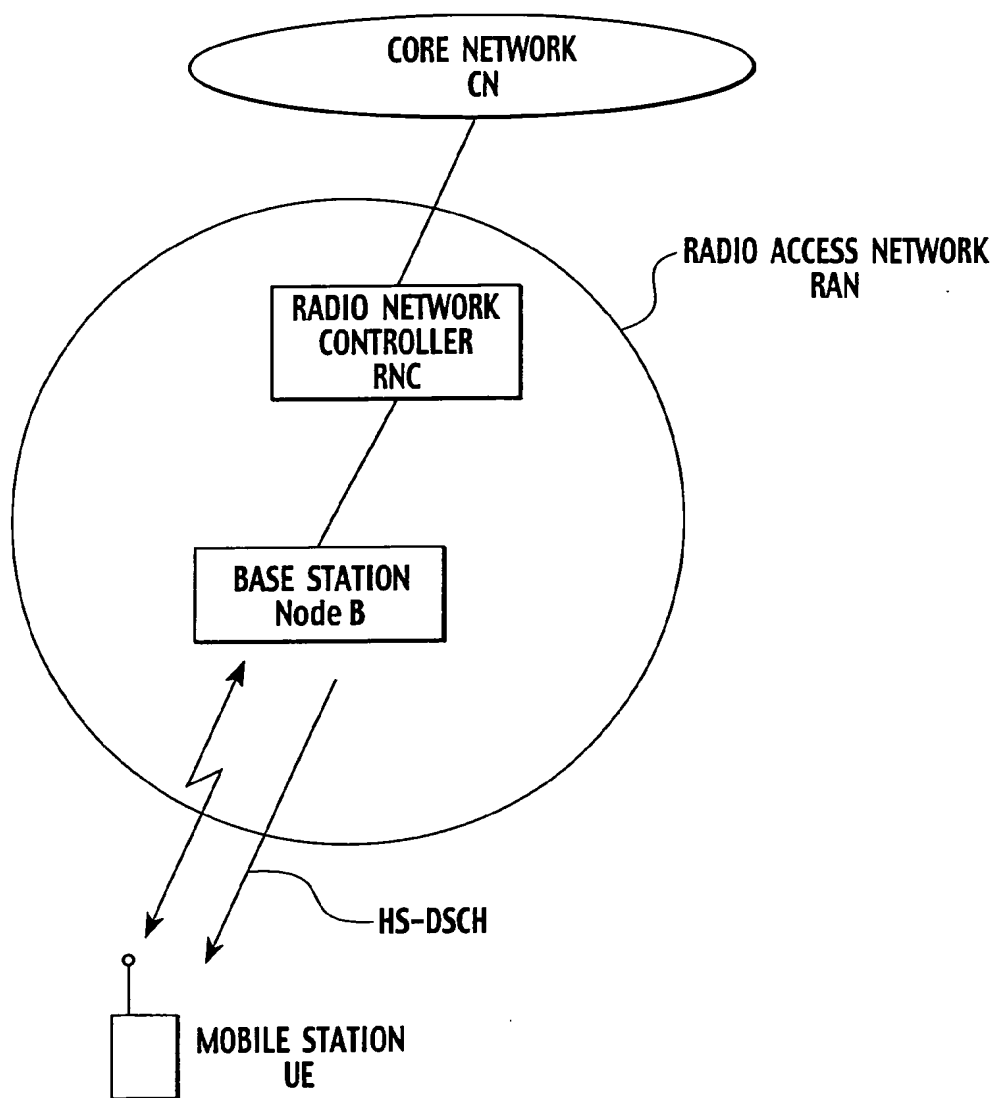


FIG.2

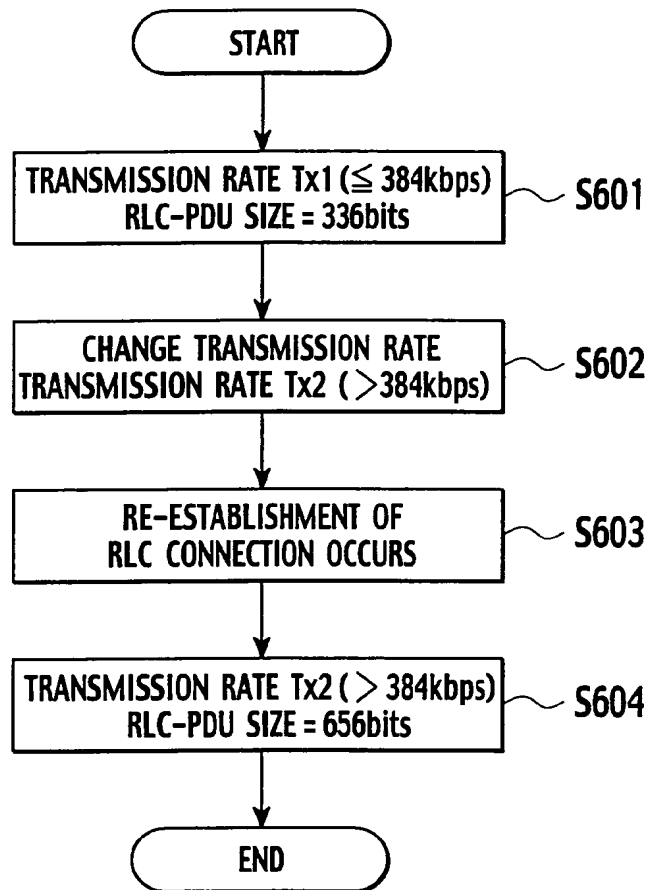


FIG.3

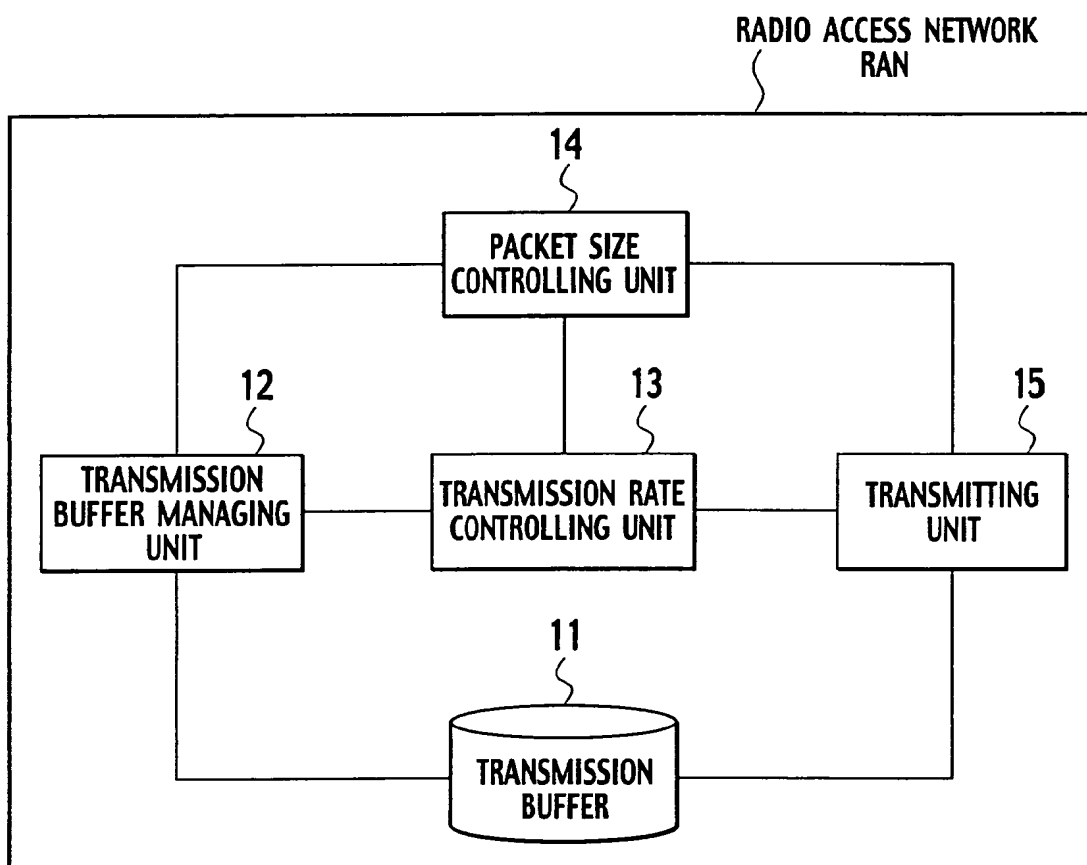


FIG.4

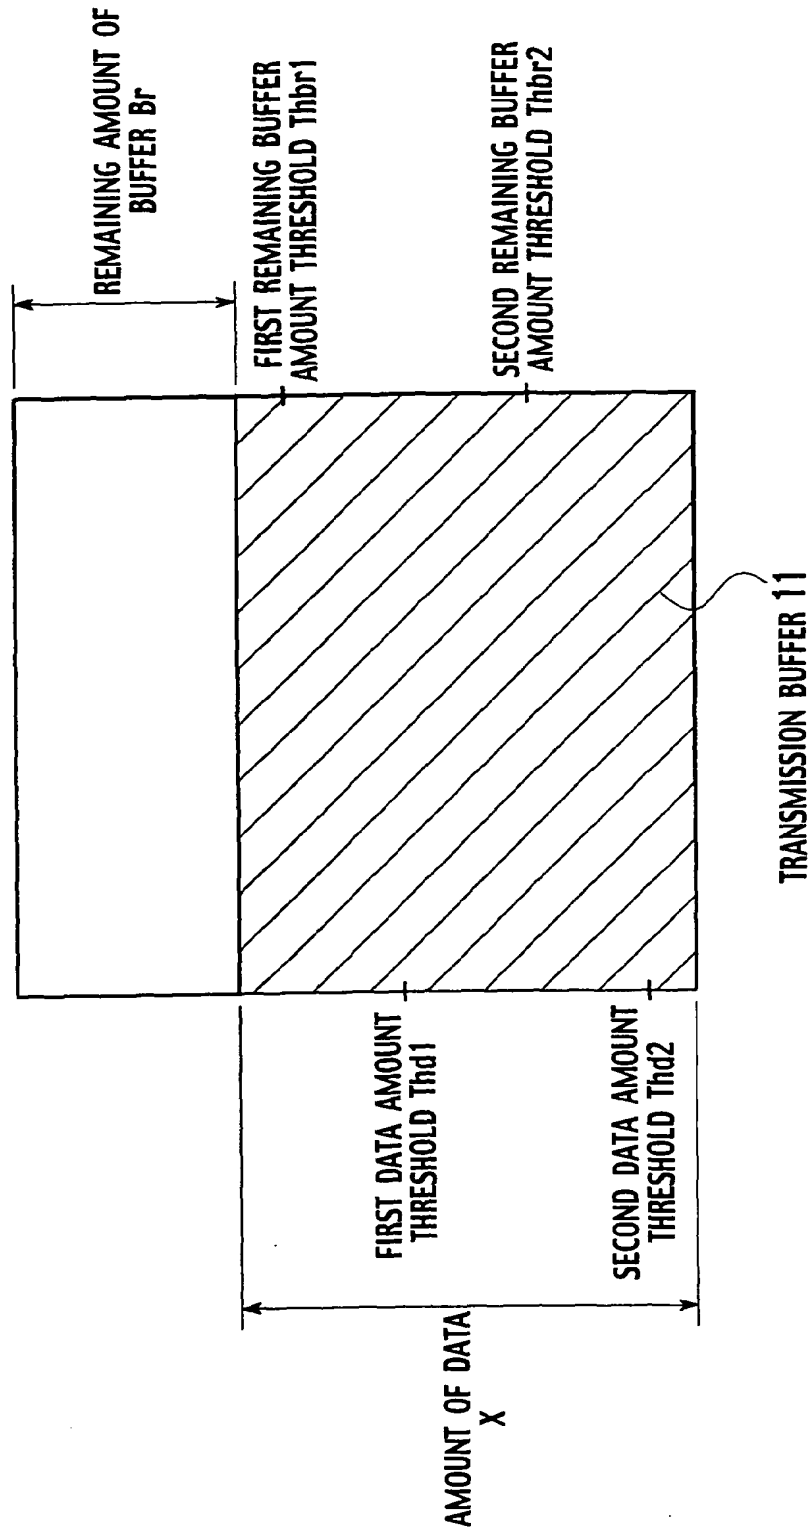


FIG.5

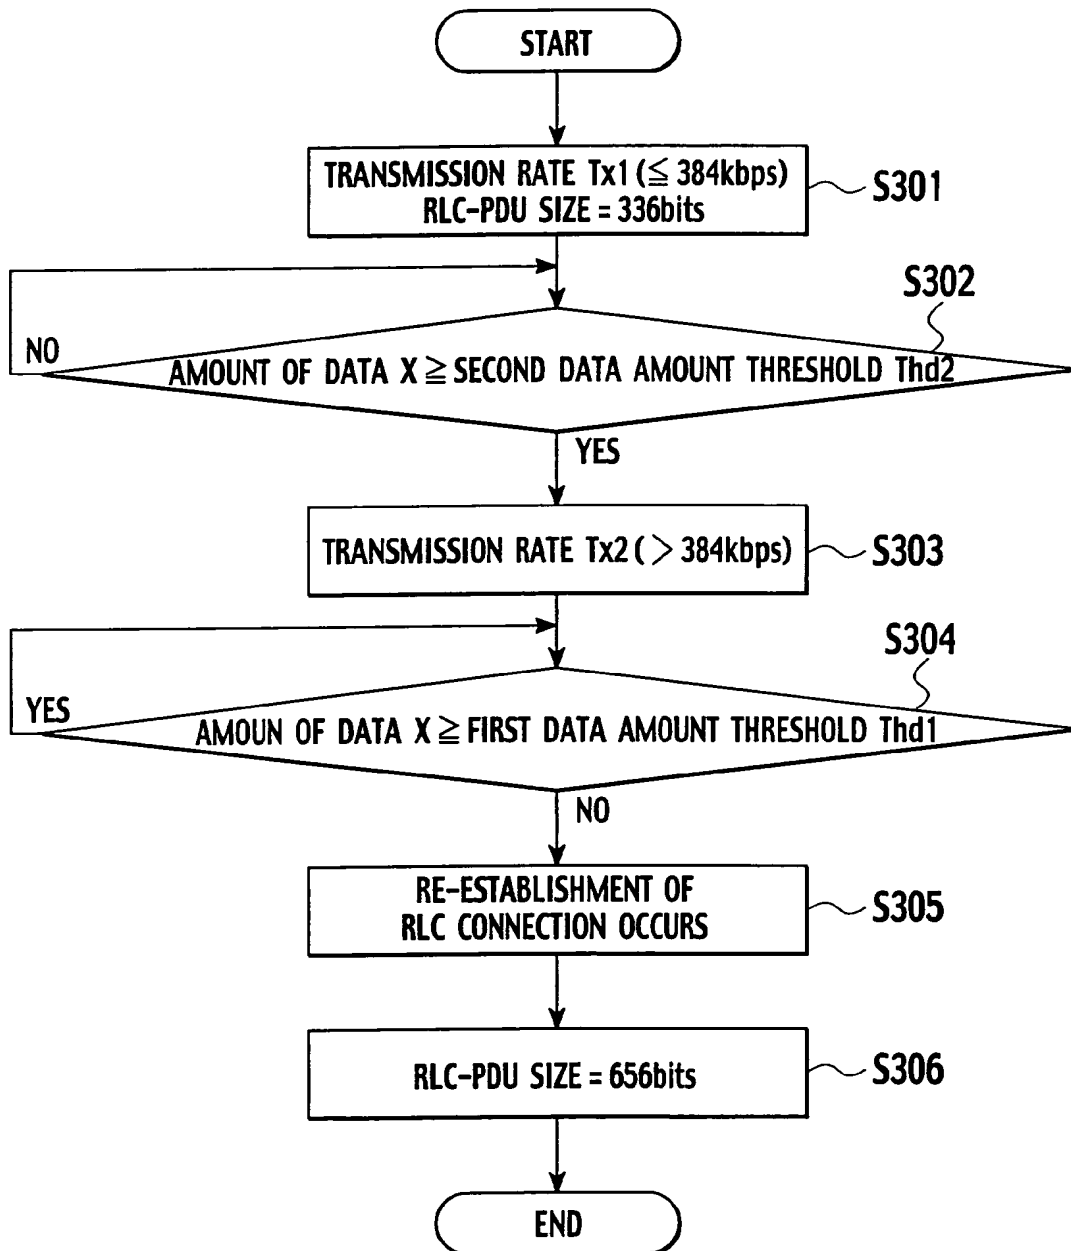


FIG.6

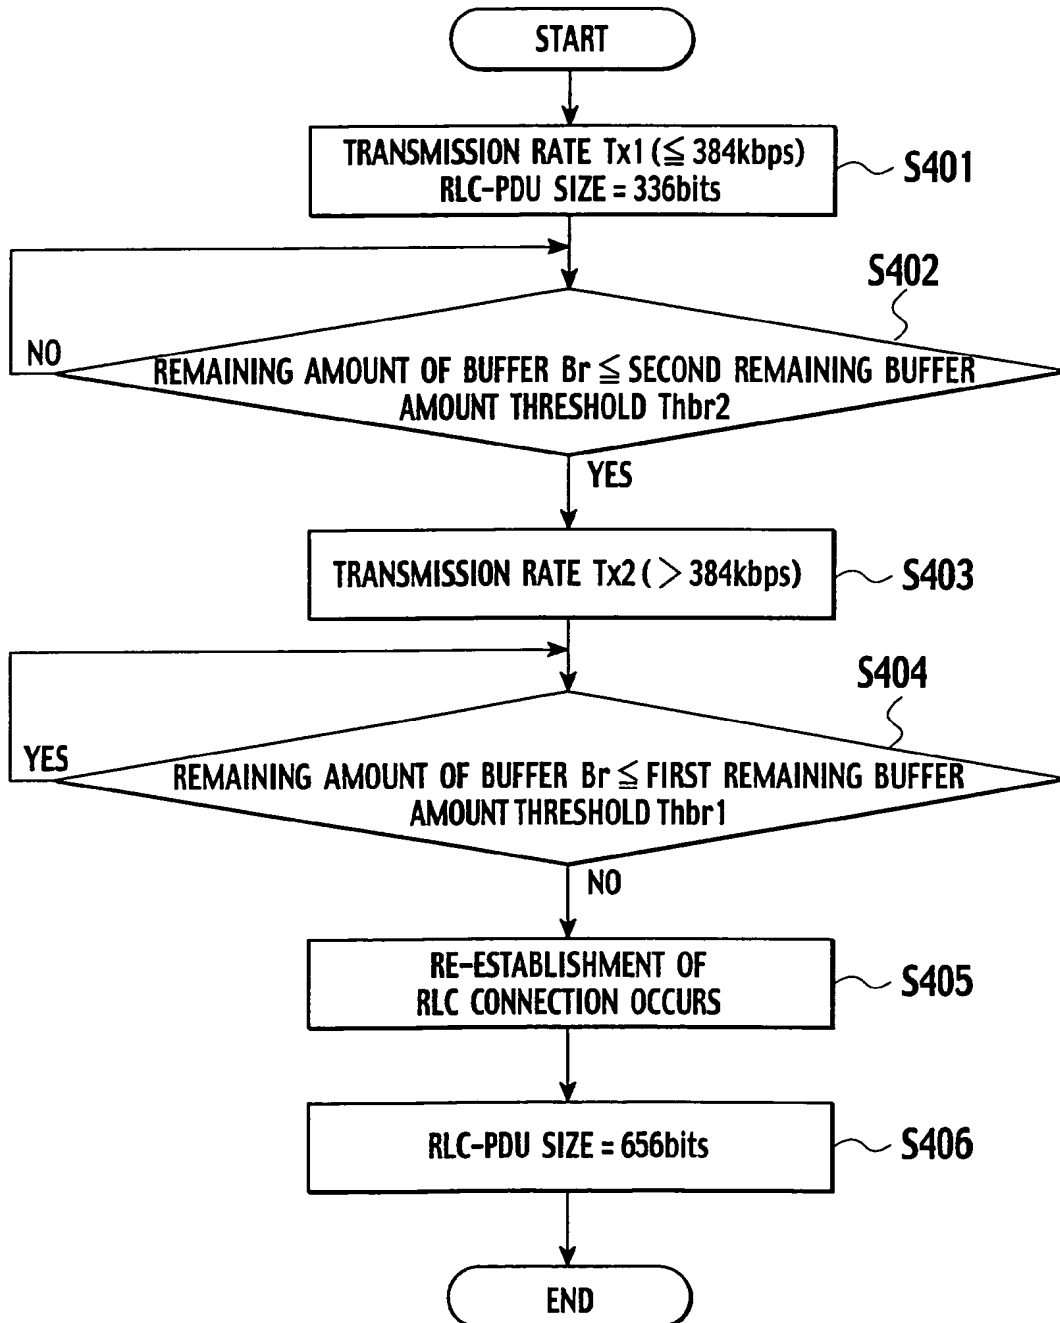


FIG.7

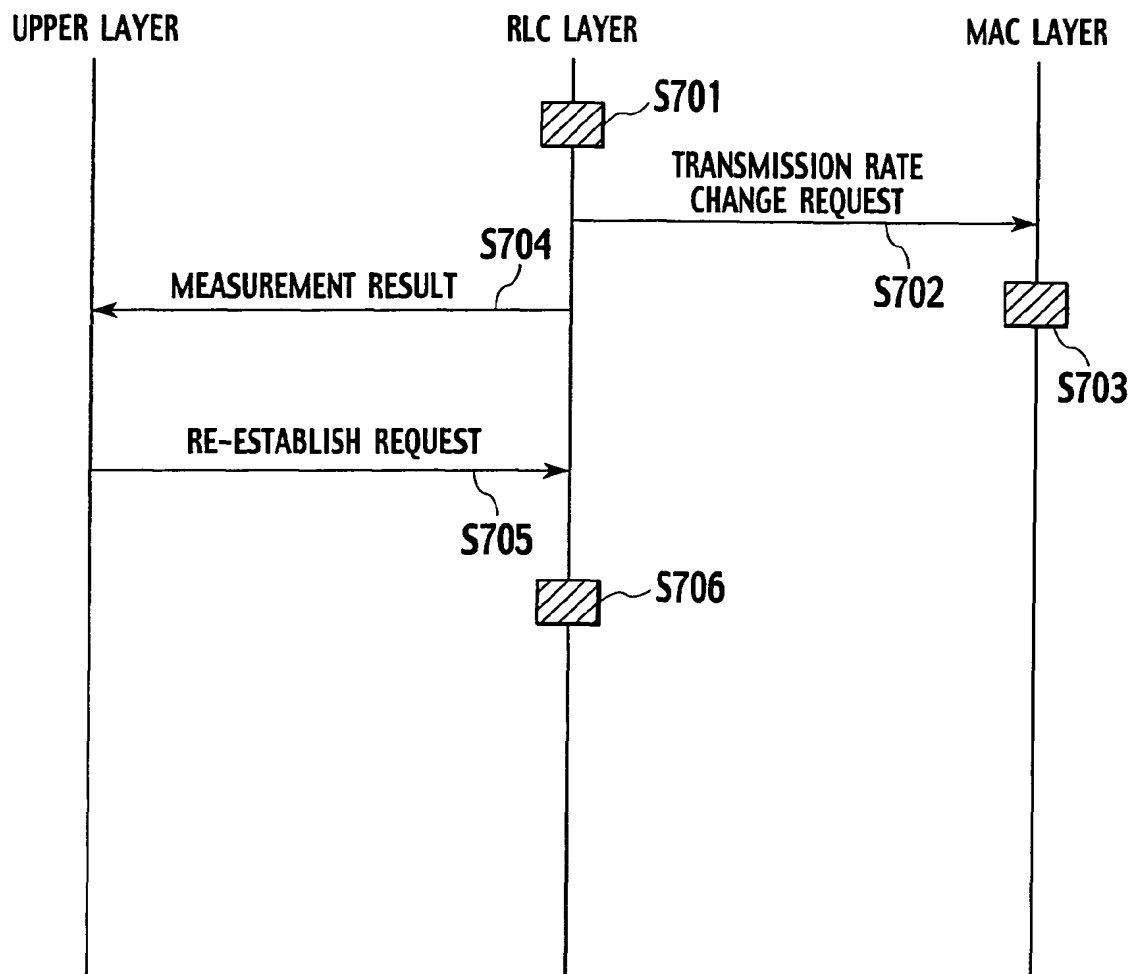


FIG.8


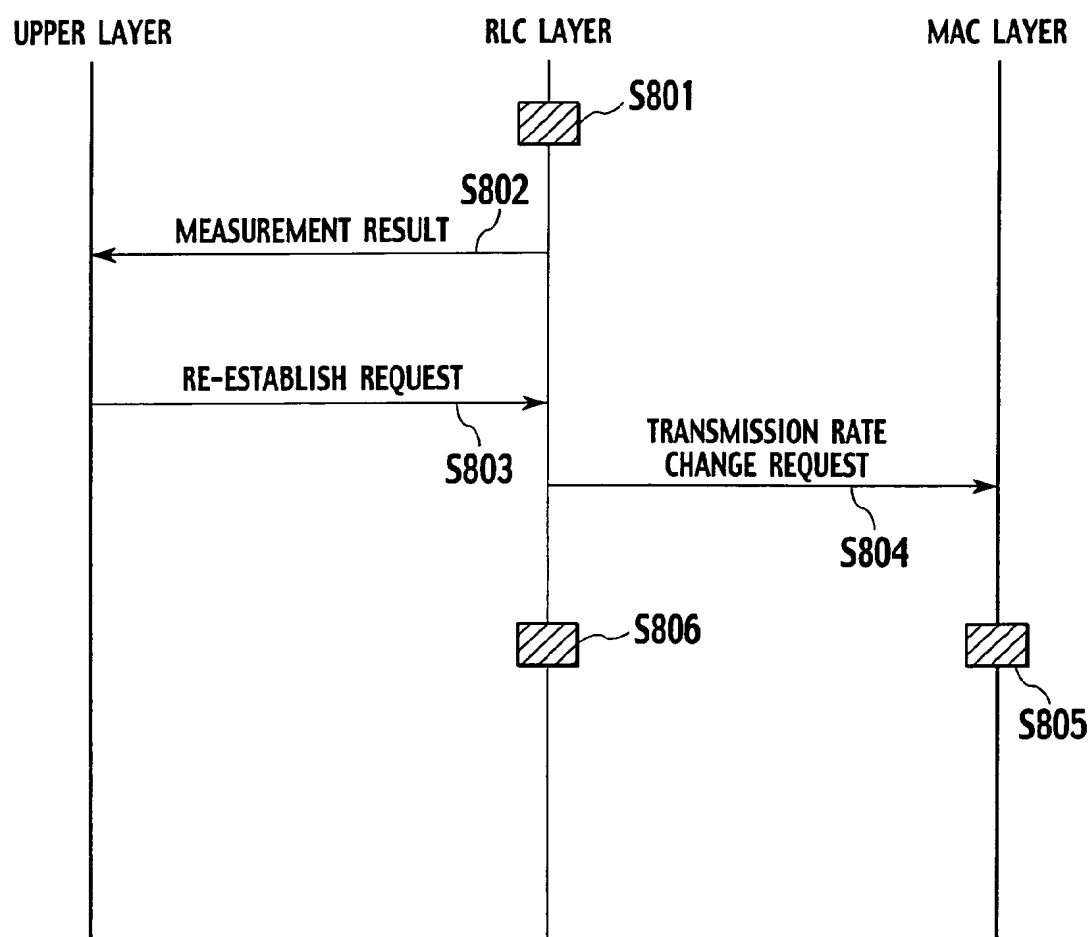


FIG.9



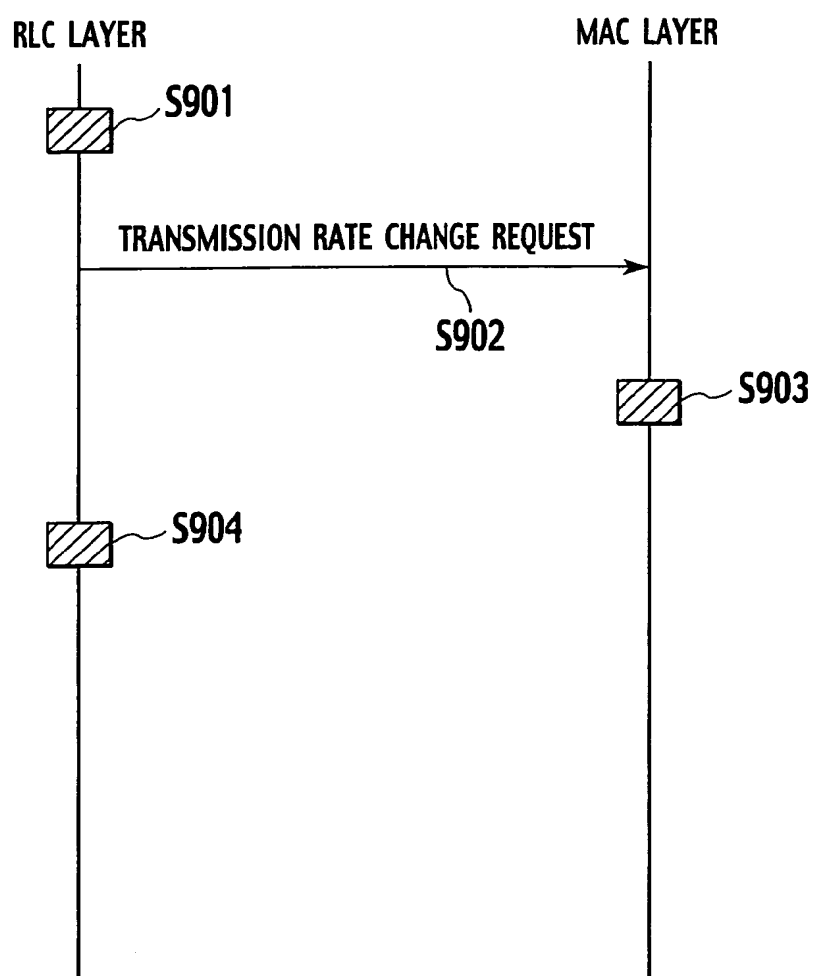

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 01 1376

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 6 563 810 B1 (CORAZZA GIOVANNI E) 13 May 2003 (2003-05-13)	1	H04L12/56
Y	* column 1, line 6 - line 10 * * column 5, line 21 - column 6, line 29 * * column 12, line 61 - column 13, line 15 * * claim 7 * * figures 1A,1B,4A *	2-7	
Y	US 2002/160784 A1 (INOUE YASUO ET AL) 31 October 2002 (2002-10-31) * page 1, paragraph 2 * * page 1, paragraph 5 * * page 1, paragraph 9 * * page 5, paragraph 67 - page 6, paragraph 83 * * figures 1,3,6-8 *	2-7	
A	GB 2 351 874 A (NIPPON ELECTRIC CO) 10 January 2001 (2001-01-10) * page 1, line 4 - line 8 * * page 12, line 15 - line 21 * * page 13, line 17 - page 14, line 17 * * figures 1,2,4 *	1-7	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04L
A	WO 01/63856 A (ERICSSON TELEFON AB L M) 30 August 2001 (2001-08-30) * page 1, line 22 - line 24 * * page 4, line 2 - line 25 * * page 14, line 22 - line 25 * * page 16, line 4 - line 22 * * page 24, line 3 - line 10 * * figures 3-5 *	1-7	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 19 August 2004	Examiner Rosenauer, H
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.02 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 01 1376

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 02/052800 A (GROENBERG PETRI ; NOKIA CORP (FI)) 4 July 2002 (2002-07-04) * abstract * * page 3, line 13 - line 22 * * page 10, line 21 - page 13, line 10 * * claim 1 * * figures 2,3 *	1-7	
A	EP 1 271 991 A (NTT DOCOMO INC) 2 January 2003 (2003-01-02) * column 1, line 7 - line 13 * * column 3, line 15 - line 38 * * column 5, line 57 - column 7, line 33 * * column 10, line 7 - column 11, line 16 * * column 15, line 6 - line 24 * * figures 3,4,9,10 *	1-7	
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 16, 8 May 2001 (2001-05-08) & JP 2001 016276 A (CANON INC), 19 January 2001 (2001-01-19) * abstract *	1-7	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search Munich		Date of completion of the search 19 August 2004	Examiner Rosenauer, H
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPF FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 01 1376

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-08-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6563810 B1	13-05-2003	AU 7623300 A	30-04-2001
		BR 0014397 A	20-08-2002
		CN 1377562 T	30-10-2002
		EP 1216595 A1	26-06-2002
		JP 2003510991 T	18-03-2003
		TW 484334 B	21-04-2002
		WO 0124568 A1	05-04-2001
		US 2003133409 A1	17-07-2003
US 2002160784 A1	31-10-2002	JP 2002330166 A	15-11-2002
GB 2351874 A	10-01-2001	JP 2000324164 A	24-11-2000
		US 6751234 B1	15-06-2004
WO 0163856 A	30-08-2001	AU 3630301 A	03-09-2001
		CN 1426651 T	25-06-2003
		EP 1264446 A1	11-12-2002
		WO 0163856 A1	30-08-2001
WO 02052800 A	04-07-2002	FI 20002848 A	23-06-2002
		CN 1478345 T	25-02-2004
		EP 1344352 A1	17-09-2003
		WO 02052800 A1	04-07-2002
		US 2004057378 A1	25-03-2004
EP 1271991 A	02-01-2003	JP 2002374321 A	26-12-2002
		CN 1392682 A	22-01-2003
		EP 1271991 A1	02-01-2003
		US 2002191559 A1	19-12-2002
JP 2001016276 A	19-01-2001	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82